

COMMUNICATION CONVERTER

TRP-C07 RS422/485 Isolated Repeater



Specifications

- ◆ Power input voltage: DC +10V to +30V.
- ◆ Power input type: Support screw terminal or external DC adaptor.
- ◆ Interface: Industrial plug-in screw terminal.
- ◆ RS485 signal: differential 2 half-duplex wires (D+,D-).
- ◆ RS422 signal: differential 4 full-duplex wires (TX+,RX+,TX-,RX-).
- ◆ Plug-in screw terminal wiring: Accepts AWG #12-30 wire.
- ◆ Distance: extend RS422/485 signal up to 4000ft. (1200M).
- ◆ Isolation voltage: 3000V DC .
- ◆ LED indicator: Power, TX, and RX.
- ◆ Power consumption: 1.2 watt.
- ◆ Operating Temperature : -20 to 65°C .
- ◆ Storage Temperature: -20 to 65°C .
- ◆ Humidity: 10-90% Non-condensing.
- ◆ Dimension: 151mm X 75mm X 26mm.
- ◆ Weight: 380g.


Introduction

TRP-C07 is designed to extend the RS422 and RS485 signals to another 4000ft (1200M) distance and increase the maximum number of connected nodes up to 32 sets. Aside from extension function TRP-C07 provides with auto configuration features in data format detecting, baud rate setting and RS485 data direction flow control. TRP-C07 is equipped with photo-couplers and internal surge protection to protect the module and all data lines against high voltage spikes , as well as ground potential differences. The industry standard DIN rail and panel mounting design enable user a fast and professional installation. TRP-C07 is the ideal solution for the user who wants to automate their application quickly, safely and cost-effectively.

Features

- ◆ Wide input range DC power supply.
- ◆ Automatic data format configuration.
- ◆ Auto direction flow control on RS485.
- ◆ Auto baud rate switching from 300bps to 115.2Kbps..
- ◆ RS485 bi-directionally communication.
- ◆ 3000V DC isolated protection.
- ◆ Surge protection on RS422/485 data lines.
- ◆ Power/TX/RX mode LED indicator.
- ◆ Support screw terminal and external DC adaptor.
- ◆ DIN rail or panel mount support.

Block Diagram

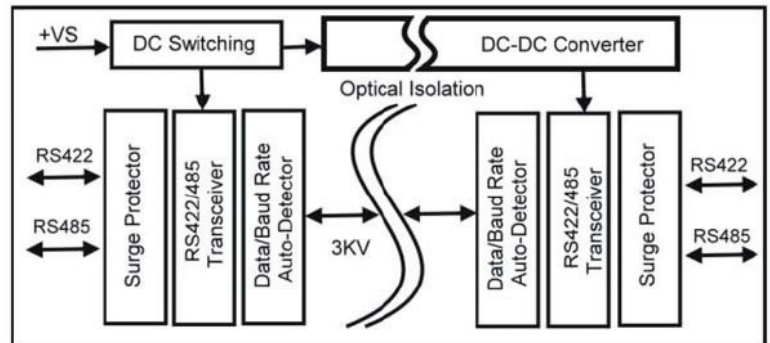

Application Note

